


Canon

iPF605

imagePROGRAF
iPF605



**TECHNICAL
DOCUMENTS**
LARGE-FORMAT PRINTING

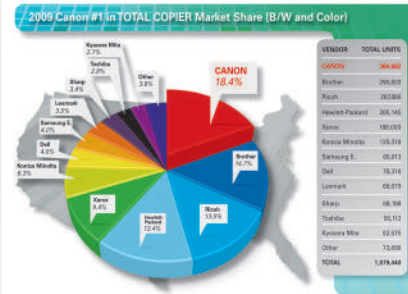

iPF605

SPECIFICATIONS



Print-Head

PF-03

Technology

FINE (Photolithography Ink-jet Nozzle Engineering)

Print Resolution (Max.)

2400 x 1200 dpi

Line Accuracy*

±0.1% or Less

Minimum Line Weight**

0.02mm

Number of Nozzles

Matte Black: 5,120 Nozzles
Other Colors: 2,560 Nozzles per Color

Droplet Size

4 Picoliter

Nozzle Pitch (Head Resolution)

1200 dpi x Two Rows

Print-Head Swath

1.07 inch

Ink Type

Dye: Cyan (C), Magenta (M), Yellow (Y), Black (B)

Pigment: Matte Black (MBK) — Two Channels

Ink Tank

PFI-102

Ink Tank Capacity

130ml per Color

Number of Colors

5

Ink Supply Method

Tubing System

Nozzle Recovery System

Non-firing Nozzle Detection and Compensation

Printer Controller

L-COA Controller

Printer Memory

256MB

Media Feed

Top-loading Manual Feed, Front-loading Manual Feed, Rear-loading Roll Feed

Media Width

Roll Feed, Manual Feed: 8" – 24" (203mm – 610mm)

Printable Margins

Roll Feed: All Sides: 0.12" (3mm) or 0" for Borderless

Manual Feed: Top Load: 3mm All Sides

Front Load: 3mm All Sides

Except Bottom (23mm)

Minimum Printable Media Length

Roll Feed: 8.0" (203mm)

Top-Loading Manual Feed: 11.0" (279mm)

Front-Loading Manual Feed: 20.5" (520mm)

Maximum Print Length[†]

Roll Feed: 59' (18m)

Manual Feed (Top): 5.2' (1.6m)

Manual Feed (Front): 36.0" (914mm)

Borderless Printing Widths (Roll Media Only)

10", 13", 14", 16", 17", 24", B4 (10.12"/257mm),

A2 (16.54"/420mm), B2 (20.28"/515mm),

A1 (23.38"/594mm)

Media Cutter

Durable Rotary Blade

Media Thickness

Cassette: 0.08 – 0.3mm (3.2 – 11.8mil)

Top-Loading Manual Feed: 0.07 – 0.8mm (2.8 – 31.4mil)

Front-Loading Manual Feed: 0.5 – 1.5mm (19.6 – 59.0mil)

Roll Feed: 0.07 – 0.8mm (3.2 – 31.4mil)

Media Core Sizes

2" and 3" Core (2/3 Core Adapter Included)

Maximum Roll Outer Diameter

5.9" (150mm)

Printing Software

imagePROGRAF Printer Driver for Windows®/Mac®,

HDI Driver,^{††} Printer Driver Extra Kit for Windows/

Mac (Free Layout, Color imageRUNNER

Enlargement Copy, Advanced Preview), Print

Plug-in for Microsoft® Word/Excel/PowerPoint for

Windows, Digital Photo Front-Access for Windows,

PosterArtist Lite for Windows

Device Status

GARO Status Monitor, Remote UI

Printer Language

GARO (Canon Proprietary), HP-GL/2, HP RTL

Operating System

Windows XP (32/64 bit), Server 2003 (32/64 bit),

Server 2008 (32/64 bit), Windows Vista® (32/64 bit),

Windows 7 (32/64 bit); Macintosh OS X 10.3.9 -

10.6 (32 bit), OS X 10.5 - 10.6 (64 bit)

Interface

Standard (Built-in): USB 2.0 Hi-Speed, 10/100Base-T/TX

Optional: IEEE1394 (FireWire)

Acoustic Noise

Operation: 49dB (A) or Less

Standby: 35dB (A) or Less

Acoustic Power: 6.3 Bels or Less

Power Supply

AC 100–120V (50-60Hz)

Power Consumption

Maximum: 100W or Less

Standby: 5W or Less (10W or less when IEEE is mounted)

Power Off: 1W or Less (Executive Order Compliant)

Certifications

UL, FCC Class B, ENERGY STAR®

Operational Environment

Temperature: 59 – 86 F° (15 – 30 C°)

Relative Humidity: 10 – 80% (No Condensation)

Physical Dimensions (H x W x D)

13.6" x 39.3" x 26.4"

39.1" x 39.3" x 34.3" with Optional Stand

Weight

Approximately 99.2 lb.

Approximately 132.3 lb. with Optional Stand

Options

Printer Stand ST-25

IEEE1394 Expansion Board (EB-05)

Roll Holder Set (RH2-24)

PosterArtist

User Replaceable Items

Print-Head (PF-03)

Ink Tanks (PFI-102)

Maintenance Cartridge (MC-16)

What's In The Box

Printer, User Software CD (Printer Driver, HDI Driver, Utilities), Application CDs, 6 Starter Ink Tanks (MBK x 2, Cyan, Magenta, Yellow, Black), 2" Core Media Spool with 3" Adapter, Print-Head, Maintenance Cartridge, Media Cutter, Built-in Ethernet/USB 2.0 Interface, Quick Setup Guide (Poster), Printer Reference Guide (Booklet), PosterArtist Lite, Power Cord, One-Year Onsite Warranty, Registration Card

* After user adjustment and under the same environmental conditions. Applies to media for line drawing only.

** Theoretical value based on data resolution.

*** The starter ink tanks initially packaged with the printer are not the same capacity as the replacement ink tanks specified here.

† The maximum printable length varies, depending on the application, OS, and RIP used.

†† For AutoCAD or AutoCAD LT 2000/2000i/2002/2004/2005/2006/2007/2008/2009/2010.

‡ Windows 2000/XP/2003 Server and for Macintosh, Auto Layout, and imageRUNNER Linking Function.

▲ For imagePROGRAF Printer Driver. For printing from PostScript® applications such as Adobe® Illustrator® or QuarkXPress®, please use a PostScript compatible RIP package. For a list of Canon recommended RIP packages, please consult with the Canon Alliance and Industry Market program list of RIP vendors located at www.usa.canon.com/imageprografsolutions.

Canon
image*ANYWARE*

1-800-OK-CANON

www.usa.canon.com

Canon U.S.A., Inc.
One Canon Park
Melville, NY 11747

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that this product meets the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. CANON, IMAGEPROGRAF, IMAGERUNNER, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All other referenced product names and marks are trademarks of their respective owners and are hereby acknowledged. Some items may not be available at this time; please check for availability. Specifications and availability subject to change without notice.

All printer output images are simulated. Printer is shown with optional stand.

©2013 Canon U.S. A., Inc. All rights reserved.

